Hajir Sanat co.

Wall-mounted Single Phase Servo Motor Type


10000VA-12KVA

Input voltage range:

- 100V-250V / 150V-250V (For 220V System)
- 88V-132V / 96V-144V (For 110V System)

Features:

- Over voltage & Under voltage protection
- Reaction time(voltage stabilization time) ≤60ms
- High precision: 220VAC±2%
- Over temperature protection
- Short delay (5s) & Long delay (255s)

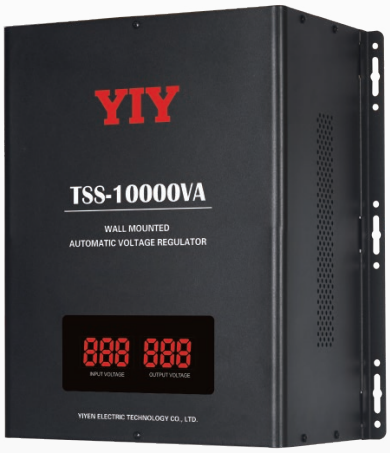



Hajir Sanat co.

Technical Parameter

Specification		10000VA	12KVA
Input	Phase	Single phase	
	Voltage	AC 100V-250V or 88V-132V	
	Frequency	50Hz/60Hz	
Output	Voltage	AC 220V ±2% or 110V ±2% (230V/240V or 120V/127V Optional)	
	Capacity	8000W	9600W
	Frequency	50Hz/60Hz	
Protection	Low voltage	184V±4V or 92V±4V	
	Over voltage	246V±4V or 123V±4V	
	Time Delay	5s / 255s	
	Overload / short circuit	Fuse/MCB	
Packaging	Pcs per Carton	1	
	Shipping Wt.(kg)	22.8	26
	Packing dimensions (mm)	450*350*255	460*360*260
Efficiency	AC-AC	98%	
Acoustic	Noise level	≤50dB	
Environment	Temperature	-5˚C to 40˚C	
	Humidity	20% to 90%	